

TOGUK Flag Set Installation / Care Instructions




Setting up the Flag Set will only take a few minutes.

Firstly, find a suitable location to setup the flag stand/s taking consideration of the weather conditions (especially wind direction & speed) and also ensuring the ground is firm and dry, the stands are foldable so will require unfolding and assembly. To assemble, unscrew the threaded bolt and unfold the legs, place the back plate into the guide holes and keep one hand on the back plate whilst you screw the bolt into the plate from the other side ensuring the plastic sleeve remains on the bolt.



Ensure the bolt is tight into the back plate and that the back plate guide pins are inserted into the stand holes, use a screwdriver (or other thin metal object) inserted into the end of the bolt head to help twist the whole bolt tight into the backplate. Be careful not to over tighten and ensure that the bolt is at the correct angle before use.

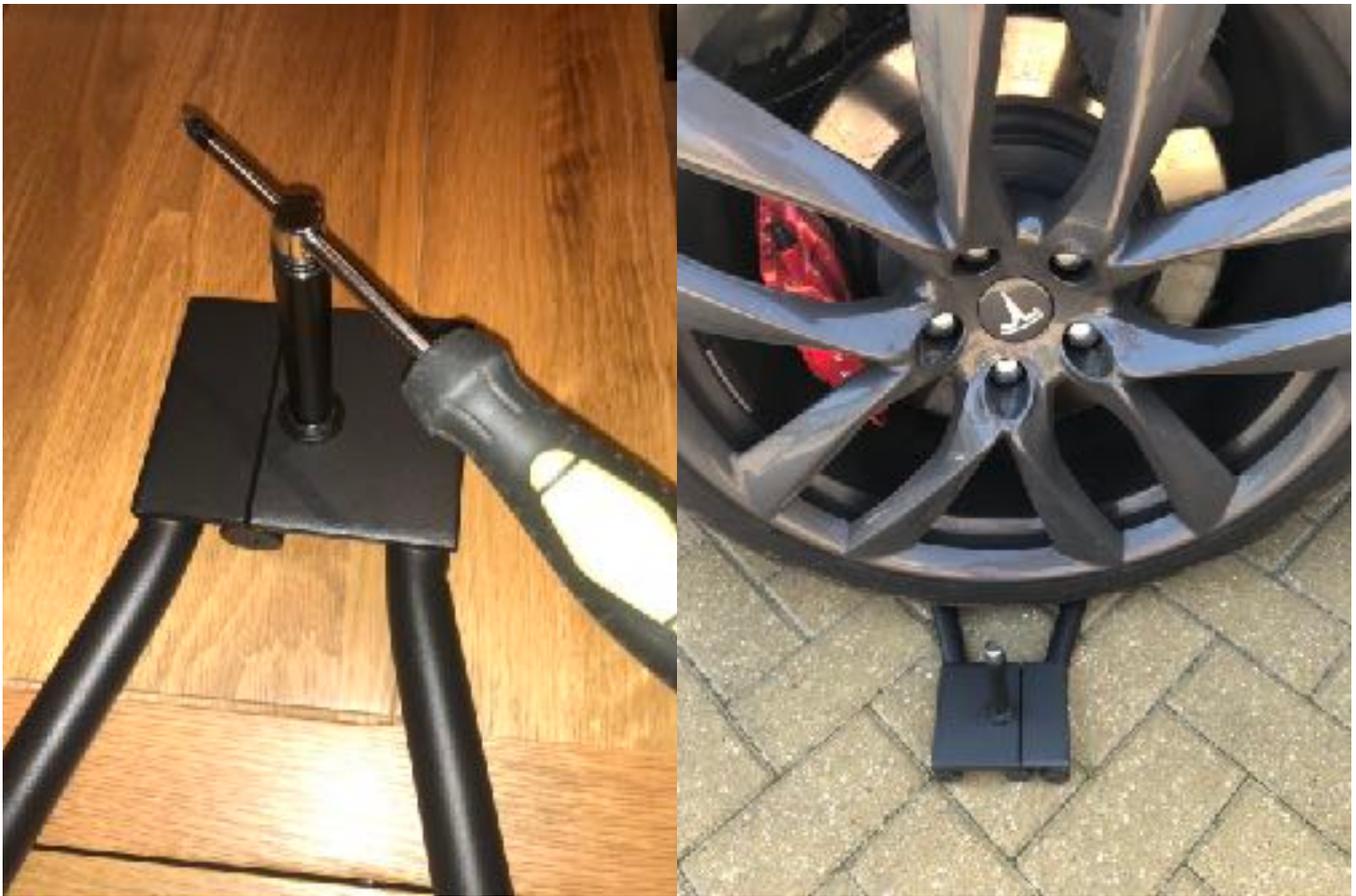

It's now time to place the stand underneath the wheel of your vehicle, you will need at least 2 people for this, one backing the car slowly on to the stand and one to position the stand and ensure it doesn't move & or come into contact with the alloy wheels. It's important to ensure that the area around the car is clear of pedestrians and debris. Constant communication is advised. You should ensure the stand is firmly underneath the car wheel and not able to move at all. You should ensure there is enough of a gap so that the flag pole/flag cannot sway in the wind to hit the car.

Unpack the carry bag and assemble the flagpole by joining the separate pole pieces together from largest to smallest. Simply insert one end of the poles into the other and push them together.

Whilst keeping the flag from touching the floor it is time to attach the teardrop flag. Start by inserting the top of the pole (the smallest section) into the bottom rod pocket of the flag and push the pole all the way through the rod pocket until it reaches the very end. The end of the rod pocket has a reinforced section - and it is important that the tip of the pole remains in this reinforced section. If you allow it to come out of this reinforced section it can damage the flag set.

You now pull the banner all the way down the pole (while pushing the pole into the flag) and will notice that the top of the pole will start to bend. Keep pushing the pole and pulling the banner until the pole has bent into the full "teardrop" shape and the flag can go no further.




Use the special locking hook provided to tie the bottom of the flag to the black securing hook on the pole. Pull the whole hook down ensuring the flag is tight. Tighten the locking mechanism so it's not able to move.

Ensure your flag base has been placed correctly, you can now insert the bottom of the pole into the spindle on the base.

Ensure that the flag pole, locking hook and flag cannot sway in the wind to hit the car paintwork or any other objects.

Ensure the flag isn't rubbing the paintwork of the car.

Your Flag Set is now set up and ready to use, watch it for a few seconds to ensure it's performing as intended and continue to check the Flag Set and Weather periodically to ensure it remains safe at all times.

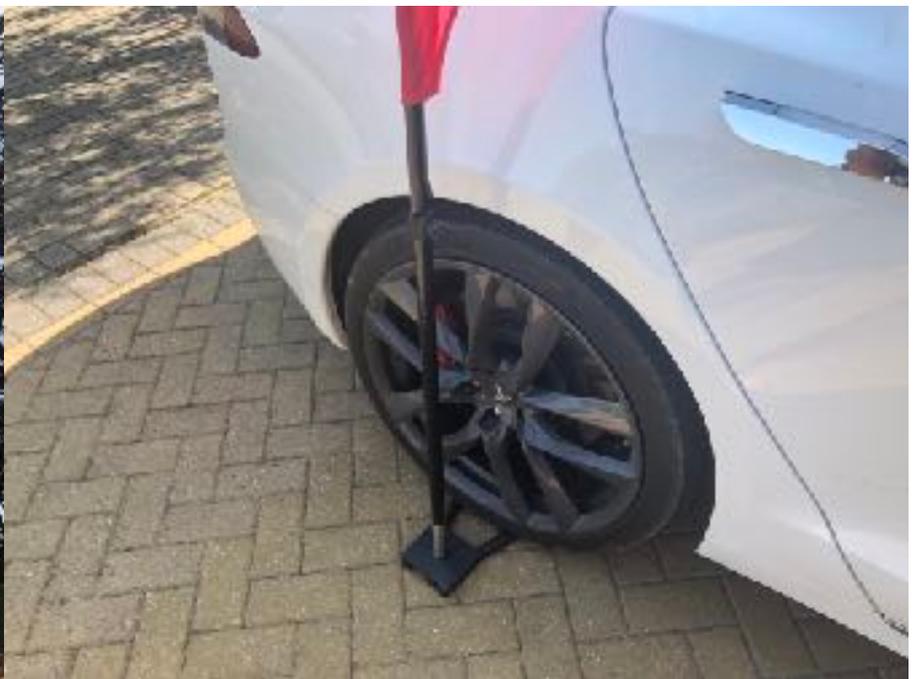

The Flag will arrive folded into a neat package and may arrive with some creases. These creases should come out naturally over time when used outdoors. However if you would like to quickly remove the creases the most effective method is with a steamer. A warm iron can also be used providing an ironing cloth is used between the banner and the iron.

Although the Flag Set is durable and designed for outdoor use, we recommend that you do not use it outdoors during extreme weather conditions to avoid any possible damage.

If the Teardrop Flag gets dirty you can clean it using cold water and a damp cloth. You can also wash it in a washing machine using a cold wash on a gentle cycle without any detergents or bleach.

In an emergency ring 999, any problems please contact Will Fealey.

